



● Nylon netting for bulwark protection

Use : this nylon net give king term resistance to UV and bad weather conditions.

Make up : 100 m reels.
Height : 50-60 cm



Easy to install



● Shockcord sandow

Braided shockcord adapted to marine use. Specific range for catamarans and other sport dinghies. Carefully produced with a selection of the best latex, nylon braided cover.



Sorgfältige Fertigung mit Auswahl des besten Latexmaterials und fein aus Nylon geklöppelte Hülle.



Ø 4 - 5 - 6 - 8 - 10 mm



Ø 4 - 5 - 6 - 8 - 10 mm



Ø 4 - 5 - 6 - 8 - 10 mm

● Bituminous braid

Ref. 7840

Use : a leading product for use as long line and trolling line, perfect for ropework.

Construction : helical nylon braided rope. This line receives a bituminous impregnation.

Make up : 100 m or 300 m hanks depending on Ø.



Ø 2 to 6 mm

Bituminous braid

Ø mm	g/m	B/S kg
2	2,6	100
2,5	3,6	110
3	5,6	170
4	9,6	250
5	13,2	350
6	23	480



Very long life product, the bituminous treated braid is compact, round and has a certain rigidity. (Does not tangle).

● Thread "CVN WERCORD"

Use : an excellent tying and messenger thread.

Make up : box of 8 tubes of 250g



The "n" treatment gives a high resistance to abrasion, and the knot does not slip.



" CVN WERCORD "

Ref.	Ø mm	B/S kg
3330	0,6	17
2220	0,9	25
1615	1,15	33
1110	1,3	50
890	1,8	63

Sewing thread


Construction : twisted thread in high tenacity polyester. Specific sailmaking treatment. High resistance to needle heat during sewing. High breaking strength.


Make up : sold in 10 mini spools boxes for references 20/3 and 30/3. Necessary in a repair kit.

Sold in boxes of 8 spools of 250 g for the reference 40/3.

Ref. 20/3  200 m mini spools, BS 8,8 kg, box of 10.

Ref. 30/3  300 m mini spools, BS 5,3 kg, box of 10.

Ref. 40/3  4000 m (average) spool, BS 4,2 kg, box of 8.


 **New ! SNAP system :** removable tube base enabling to keep the end of the thread after use.





Ref. 20/3
30/3


Whipping twine

Braided high tenacity polyester thread.

Ref. 2006 : 0,9 mm  70 m reel, BS 23 kg, box of 10.

Ref. 2009 : 1,2 mm  50 m reel, BS 36 kg, box of 10.


Ref. 2012 : 1,6 mm  35 m reel, BS 48 kg, Box of 10.


 Slightly sticky to make the whipping easier.



Splicing fids


Use : for splices on ropes and braided ropes from 4 mm to 10 mm.

 high quality stainless steel. Splicing manual for 3 strand ropes included !

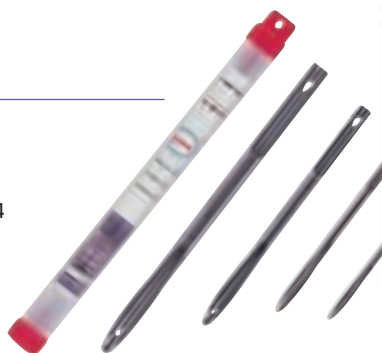

Large display units

Height : 2 m
Width : 1 m
Depth : 0,60 m

 **New ! adjustable support** enabling display of small reels "fun" and 4874. Capacity : 48 small reels.



Hot knife 60W


Use : this hot knife will enable you to cut properly and efficiently your ropes and webbings. Avoids using whipping twine or scotch tape.



Rope length measurer

Useful wooden handle. High precision (it is however advisable to calibrate it regularly)

Use : accepts to \varnothing 3 to 20 mm ropes.



Slings

Full range of slings and mooring products for : trave-lift, mooring on trailers.

