







BLOCKS - AP All Purpose

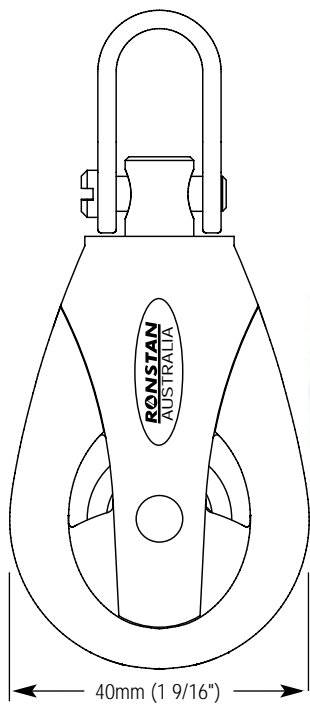

All Purpose Series 40 blocks are typically used for mainsheet, halyard, vang and spinnaker sheets on boats up to 8 metres (26 feet) as well as general service applications on larger boats. UV stabilised Acetal sheaves provide bearing performance on a polished Stainless Steel race

that performs equally well with dynamic and static loads, to provide maximum durability and a long service life. Maximum working loads start at 400kg (880lb) for the All Purpose single block.

Captive Lock™ universal heads allow the blocks to be fixed in either of two planes, or free to swivel as required. Double and triple blocks can be locked at 0° or 90° by removing the shackle and changing the headpost orientation.



PRODUCT No.	DESCRIPTION	SHEAVE DIAM.		MAX. ROPE		PIN DIAM.		MWL		BL		WEIGHT	
		mm	(in.)	mm	(in.)	mm	(in.)	kg	(lb)	kg	(lb)	g	(oz)
<b>AP All Purpose</b>													
RF41100	Single block, universal head	40	(1 9/16)	10	(7/16)	5	(3/16)	400	(880)	1000	(2200)	71	(2.5)
RF41101	Single block, loop head	40	(1 9/16)	10	(7/16)	-	-	400	(880)	1000	(2200)	54	(1.9)
RF41110	Single block, becket, universal head	40	(1 9/16)	10	(7/16)	5	(3/16)	400	(880)	1000	(2200)	80	(2.8)
RF41111	Single block, becket, loop head	40	(1 9/16)	10	(7/16)	-	-	400	(880)	1000	(2200)	61	(2.2)
RF41140	Stand-up block	40	(1 9/16)	10	(7/16)	-	-	400	(880)	800	(1760)	72	(2.5)
RF41202	Double block, 2-axis shackle head	40	(1 9/16)	10	(7/16)	5	(3/16)	600	(1320)	1200	(2650)	135	(4.8)
RF41212	Double block, becket, 2-axis shackle head	40	(1 9/16)	10	(7/16)	5	(3/16)	600	(1320)	1200	(2650)	143	(5.0)
RF41302	Triple block, 2-axis head	40	(1 9/16)	10	(7/16)	5	(3/16)	700	(1540)	1400	(3090)	195	(6.9)
RF41312	Triple block, becket, 2-axis head	40	(1 9/16)	10	(7/16)	5	(3/16)	700	(1540)	1400	(3090)	209	(7.4)



Fiddle blocks can be used in direct 4:1 purchase systems such as mainsheets and boom vang, or on larger boats for fine-tune mainsheet tackle, outhauls, cunninghams, checkstays, genoa lead pullers and traveller controls.

The angle of the cleat arms can be adjusted easily for optimum alignment when trimming, cleating and releasing. Sliding posts are simply pulled out of the stops to adjust (no tools required), and then snap back into the locked position to secure the arms.

Snap shackle adapters fit the head posts of all Series 40 blocks, and are available in swivel and trunnion versions.

Cheek blocks can be mounted on masts and booms using the curved surface adapter. These

blocks can be stacked to create double versions, but no more than 60% of the rated working load should be applied to the upper sheave.

The RF41177 jib lead fits 25mm (1") T-Track. (See page 56 for further details)

**SMART FEATURES™**

- ▶ Exceptionally high working loads
- ▶ Low maintenance, long service life
- ▶ Removable becket pins
- ▶ Captive Lock™ universal head fitting
- ▶ Quick adjusting cleat arms

**MATERIALS**

- ▶ UV stabilised Acetal sheaves
- ▶ Impact modified, fibre reinforced and UV stabilised Zytel® cheeks
- ▶ Grade 316 Stainless Steel load straps and head fittings

PRODUCT No.	DESCRIPTION	SHEAVE DIAM.		MAX. ROPE		PIN DIAM.		MWL		BL		WEIGHT	
		mm	(in.)	mm	(in.)	mm	(in.)	kg	(lb)	kg	(lb)		g
<b>AP All Purpose</b>													
RF41151	Cheek block	40	(1 9/16)	10	(7/16)	-	-	400	(880)	1000	(2200)	66	(2.3)
RF41177	Single block, 25mm T-track slide	40	(1 9/16)	10	(7/16)	-	-	400	(880)	800	(1760)	166	(5.9)
RF41500	Fiddle block, universal head	40 + 24	(1 9/16 + 15/16)	8	(5/16)	5	(3/16)	400	(880)	1000	(2200)	91	(3.3)
RF41510	Fiddle block, becket, universal head	40 + 24	(1 9/16 + 15/16)	8	(5/16)	5	(3/16)	400	(880)	1000	(2200)	98	(3.5)
RF41520	Fiddle block, adjustable cleat, universal head	40 + 24	(1 9/16 + 15/16)	8	(5/16)	5	(3/16)	400	(880)	1000	(2200)	157	(5.5)
RF41530	Fiddle block, becket, adjustable cleat, universal head	40 + 24	(1 9/16 + 15/16)	8	(5/16)	5	(3/16)	400	(880)	1000	(2200)	164	(5.8)
<b>Accessories</b>													
RF6170	Snap shackle head adapter	-	-	-	-	4.8	(3/16)	565	(1240)	1135	(2500)	49	(1.7)
RF6171	Trunnion snap shackle head adapter	-	-	-	-	4.8	(3/16)	565	(1240)	1135	(2500)	62	(2.2)
RF41153	Curved surface adapter for cheek block	-	-	-	-	-	-	-	-	-	-	9	(0.3)