



FEATURES

- ▶ Low friction, 2-stage ball bearing system provides consistent performance over the full load range.
- ▶ High static and dynamic load capacity.
- ▶ Light weight.
- ▶ Captive Lock™ universal head can be fixed at 0 or 90 degrees, or left free to swivel 360 degrees.
- ▶ Cheek cut-outs for easy bearing maintenance.



▶ **RF150**
4.8mm (3/16") pin suits single and fiddle blocks

▶ **RF151**
6mm (1/4") pin, suits double and triple blocks



▶ **RF51010**
snap-in keyhole becket pin and roller



▶ **RF51011**
becket pin, roller and split ring

PRODUCT No.	DESCRIPTION	SHEAVE DIAM.		MAX. ROPE		MAX. WIRE		PIN DIAM.		M.W.L.		B.L.		WEIGHT	
		mm	(in.)	mm	(in.)	mm	(in.)	mm	(in.)	kg	(lb)	kg	(lb)	g	(oz)
BB Ball Bearing															
RF50100	Single block, universal head	50	(2)	12	(1/2)	-	-	5	(3/16)	500	(1100)	1500	(3310)	117	(4.1)
RF50101	Single block, loop head	50	(2)	12	(1/2)	-	-	-	-	500	(1100)	1500	(3310)	97	(3.4)
RF50110	Single block, becket, universal head	50	(2)	12	(1/2)	-	-	5	(3/16)	500	(1100)	1500	(3310)	133	(4.7)
RF50111	Single block, becket, loop head	50	(2)	12	(1/2)	-	-	-	-	500	(1100)	1500	(3310)	113	(4.0)
RF50171	Upright lead block	50	(2)	12	(1/2)	-	-	-	-	500	(1100)	1500	(3310)	116	(4.1)
RF50200	Double block, universal head	50	(2)	12	(1/2)	-	-	6	(1/4)	800	(1760)	2000	(4410)	254	(9.0)
RF50210	Double block, becket, universal head	50	(2)	12	(1/2)	-	-	6	(1/4)	800	(1760)	2000	(4410)	270	(9.5)
HL High Load															
RF50100HL	Single block, universal head	50	(2)	12	(1/2)	5	(3/16)	5	(3/16)	800	(1760)	1500	(3310)	117	(4.1)
RF50110HL	Single block, becket, universal head	50	(2)	12	(1/2)	5	(3/16)	5	(3/16)	800	(1760)	1500	(3310)	133	(4.7)
RF50171HL	Upright lead block	50	(2)	12	(1/2)	5	(3/16)	-	-	800	(1760)	1500	(3310)	115	(4.1)



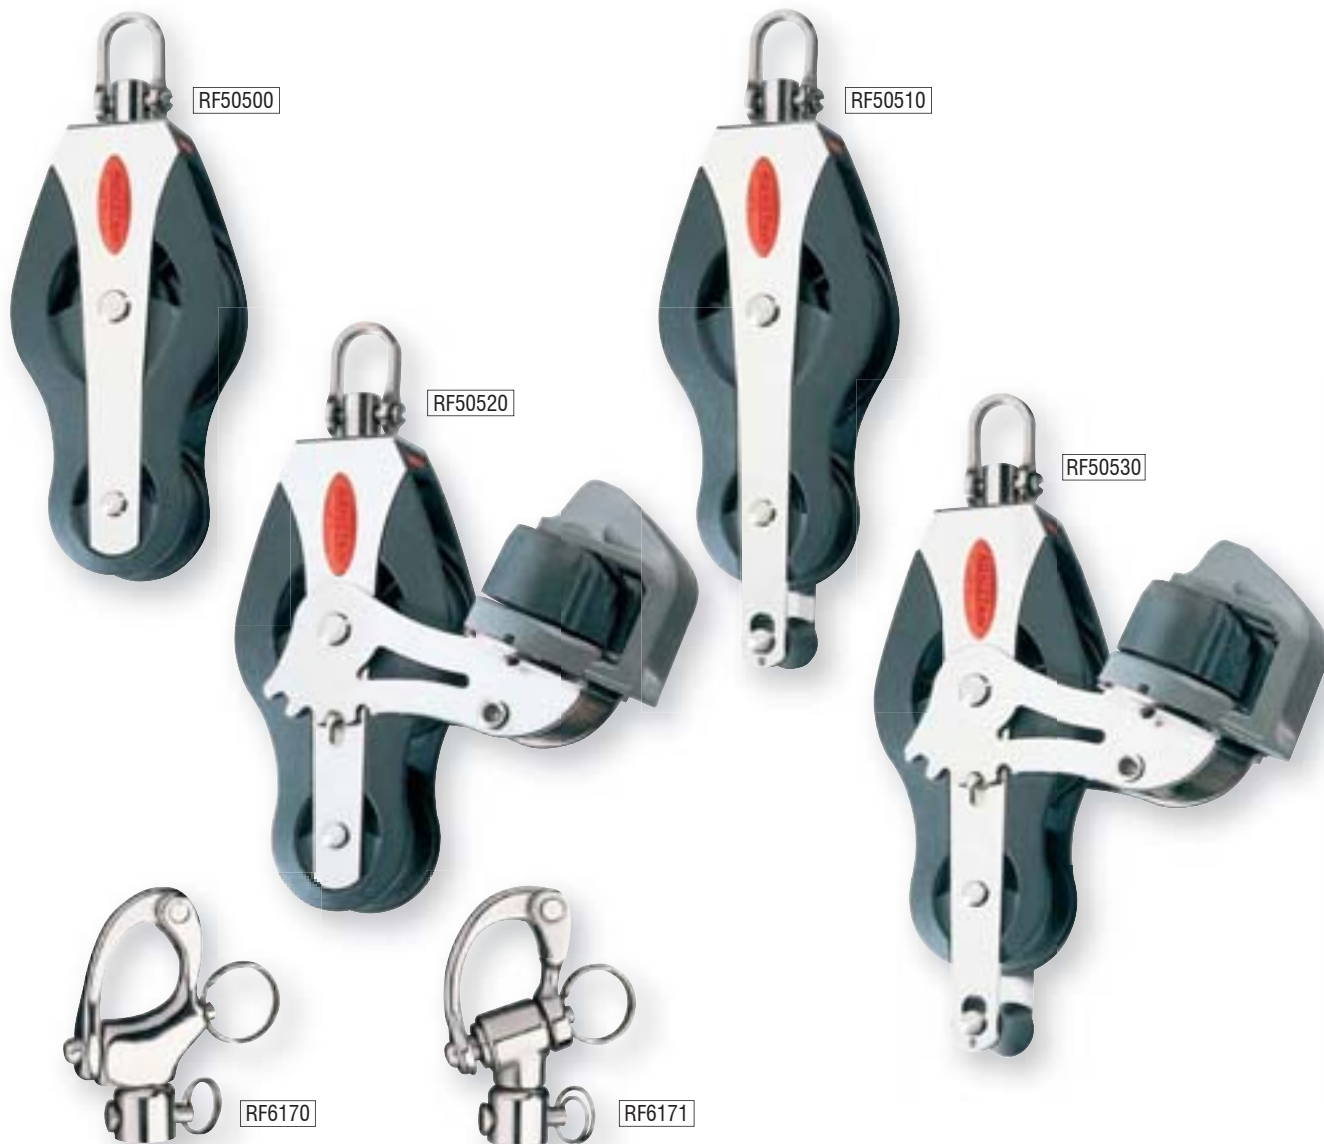
FEATURES

- ▶ Removable becket pins allow lines to be spliced prior to fitting and are locked into position without the use of split rings or tools.
- ▶ Double & triple blocks can be locked at 0 or 90 degrees, or left free to swivel, by adjusting the head post grub screw.
- ▶ A stand-up base adapter and snap shackle adapters add functionality to single and fiddle blocks.
- ▶ Clevis Pin head blocks have an alloy sheave with oversize Torlon® ball bearings to minimise friction.
- ▶ Jib lead slide with pin stop suits RC7250 25mm (1") T-track.



▶ **RF805** – 8mm (5/16") pin, suits RF54108, RF54118

PRODUCT No.	DESCRIPTION	SHEAVE DIAM. mm (in.)	MAX. ROPE mm (in.)	MAX. WIRE mm (in.)	PIN DIAM. mm (in.)	M.W.L. kg (lb)	B.L. kg (lb)	WEIGHT g (oz)
BB Ball Bearing								
RF50300	Triple block, universal head	50 (2)	12 (1/2)	- -	6 (1/4)	1000 (2200)	2400 (5290)	367 (12.9)
RF50310	Triple block, becket, universal head	50 (2)	12 (1/2)	- -	6 (1/4)	1000 (2200)	2400 (5290)	385 (13.6)
RF54000	Sheave, alloy, Torlon® balls	50 (2)	8 (5/16)	- -	- -	450 (990)	- -	31 (1.1)
RF54108	Single block, clevis pin head, alloy sheave, Torlon® balls	50 (2)	8 (5/16)	- -	8 (5/16)	450 (990)	1350 (2980)	117 (4.1)
RF54118	Single block, becket, clevis pin head, alloy sheave, Torlon® balls	50 (2)	8 (5/16)	- -	8 (5/16)	675 (1490)	1350 (2980)	138 (4.9)
HL High Load								
RF50000HL	Sheave, HL Nylatron®	50 (2)	12 (1/2)	5 (3/16)	- -	- -	- -	27 (1.0)
Accessories								
RF2450	Stand-up base, 51 x 75mm (2" x 2 31/32") base	- -	- -	- -	5 (3/16)	500 (1100)	1135 (2500)	77 (2.7)
RF72539	25mm (1") T-track slide with block head adapter, spring-loaded track stop	- -	- -	- -	5 (3/16)	500 (1100)	1000 (2200)	127 (4.5)


FEATURES

- ▶ Fiddle blocks are ideal for fine-tune mainsheet tackles, cunninghams, boom vang, backstays and other control line purchase systems.
- ▶ Captive Lock™ universal head can be fixed at 0 or 90 degrees, or left free to swivel 360 degrees.
- ▶ Quick adjusting cleat arms require no tools to adjust and fix in desired position.

- ▶ Snap shackle adapters suit single and fiddle blocks and are available in standard and trunnion versions.

MATERIALS

- ▶ Acetal ball bearings.
- ▶ Alloy sheave versions use Torlon® ball bearings.

- ▶ High Load sheave uses self lubricating Nylatron®.
- ▶ U.V. stabilised Acetal sheaves.
- ▶ Impact modified, fibre reinforced and U.V. stabilised Zytel® cheeks.
- ▶ Grade 316 stainless steel load straps and head fittings.

▶ **RF150**
4.8mm (3/16") pin

▶ **RF51010**
snap-in keyhole becket pin and roller

▶ **RF51011**
becket pin, roller and split ring

PRODUCT DESCRIPTION

No.	SHEAVE DIAM.	MAX. ROPE	PIN DIAM.	M.W.L.		B.L.		WEIGHT	
				mm	(in.)	kg	(lb)	kg	(lb)
BB Ball Bearing									
RF50500	Fiddle block, universal head	54 + 34 (2 1/8 + 1 5/16)	10 (3/8)	5 (3/16)	500 (1100)	1500 (3310)	166 (5.9)		
RF50510	Fiddle block, becket, universal head	54 + 34 (2 1/8 + 1 5/16)	10 (3/8)	5 (3/16)	500 (1100)	1500 (3310)	175 (6.2)		
RF50520	Fiddle block, adjustable cleat, universal head	54 + 34 (2 1/8 + 1 5/16)	10 (3/8)	5 (3/16)	500 (1100)	1500 (3310)	309 (10.9)		
RF50530	Fiddle block, becket, adjustable cleat, universal head	54 + 34 (2 1/8 + 1 5/16)	10 (3/8)	5 (3/16)	500 (1100)	1500 (3310)	334 (11.8)		

Accessories

RF6170	Snap shackle head adapter	-	-	5 (3/16)	565 (1250)	1135 (2500)	49 (1.7)		
RF6171	Trunnion snap shackle head adapter	-	-	5 (3/16)	565 (1250)	1135 (2500)	62 (2.2)		