




RF258100



RF258151

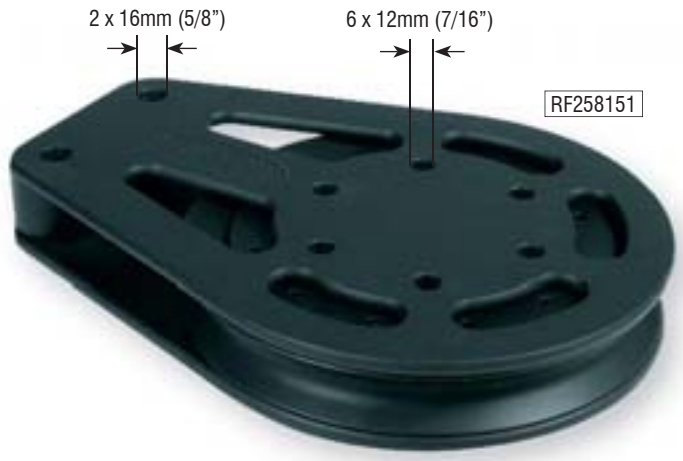

RF258251

FEATURES

- ▶ High static and dynamic load capacity achieved with alloy sheaves, Torlon® needle rollers for axial loads, Acetal ball bearings for side thrust loads.
- ▶ Head post of swivel block can be locked at 0 or 90 degrees.
- ▶ High strength shackle is forged grade 17-4PH stainless steel.


- ▶ Cheek cut-outs for easy bearing maintenance.

APPLICATIONS

- ▶ Mainsheet and Genoa sheets on yachts over 31m (102').

MATERIALS

- ▶ Alloy sheave and cheek plates.
- ▶ Torlon® needle rollers.
- ▶ Carbon black Acetal ball bearings.
- ▶ Grade 316 stainless steel head post.

PRODUCT No.	DESCRIPTION	SHEAVE DIAM.		MAX. ROPE		PIN DIAM.		M.W.L.		B.L.		WEIGHT	
		mm	(in.)	mm	(in.)	mm	(in.)	kg	(lb)	kg	(lb)	g	(oz)
 Roller Ball Bearing													
RF258100	Single block	240	(9 1/2)	24	(15/16)	24	(15/16)	15000	(33070)	30000	(66120)	8060	(284.8)
RF258151	Foot block, single	240	(9 1/2)	24	(15/16)	-	-	19000	(41890)	38000	(83780)	5465	(192.8)
RF258251	Foot block, double	240	(9 1/2)	24	(15/16)	-	-	19000*	(41890)*	38000*	(83780)*	9440	(332.9)

* Total block load. Maximum load on top sheave not to exceed 50% of total block load.